


Suspended decorative luminaire for LED light sources.

<b>TECHNICAL DATA</b>	<b>Mounting:</b> suspended, on wire suspension (included)
	<b>Body:</b> black glossy plastic material
	<b>Colour:</b> black
<b>ELECTRICAL DATA</b>	<b>Power:</b> 220-240V 50/60Hz
	<b>Includes light source:</b> yes
	<b>Type of equipment:</b> ED
<b>OPTICAL DATA</b>	<b>Way of lighting:</b> direct
<b>ADDITIONAL INFO</b>	<b>Available on request:</b> DIM 1., 10V, DALI
<b>GENERAL DATA</b>	<b>Warranty:</b> 3 years + 2 years after project registration
	<b>Application:</b> offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
250013.5L01.111	120°	16	19	1710	1130	59	4000	≥81
250013.5L02.111	120°	16	19	1575	1040	55	3000	≥81
250013.5L03.112	120°	22	26	2280	1500	58	4000	≥81
250013.5L04.112	120°	22	26	2100	1380	53	3000	≥81

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
250013.5L01.111	600 150 33	414	28	1	2.1
250013.5L02.111	600 150 33	414	28	1	2.1
250013.5L03.112	750 150 33	428	28	1	2.6
250013.5L04.112	750 150 33	428	28	1	2.6

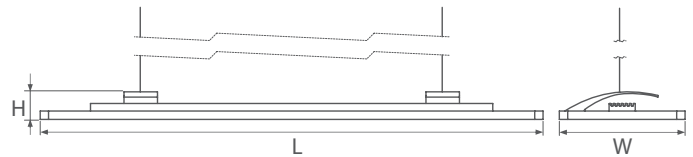

#### LIGHT BEAM CURVES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires