


Modern downlight luminaire for LED light sources for plaster board ceilings.

TECHNICAL DATA	Mounting: in the ceiling, with mounting brackets (included) Body: powder painted steel sheet, projector rings made of aluminum Colour: black and white
ELECTRICAL DATA	Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: metal halide light sources (on request), DALI Lifetime (L70B50): 80 000 h
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
200033.5L101.31	24°	17,5	21	1560	1560	74	4000	92
200033.5L102.31	24°	17,5	21	1430	1430	68	3000	92
200033.5L103.31	40°	17,5	21	1560	1560	74	4000	92
200033.5L104.31	40°	17,5	21	1430	1430	68	3000	92

Code	Dimensions [mm] L W H D1 D2	Mounting dimensions [mm] L W H D	Pallet quantity	Quantity in package	Net weight [kg]
200033.5L101.31	274 259 170 170 184	185 175 190 1.5	96	1	2.5
200033.5L102.31	274 259 170 170 184	185 175 190 1.5	96	1	2.5
200033.5L103.31	274 259 170 170 184	185 175 190 1.5	96	1	2.5
200033.5L104.31	274 259 170 170 184	185 175 190 1.5	96	1	2.5

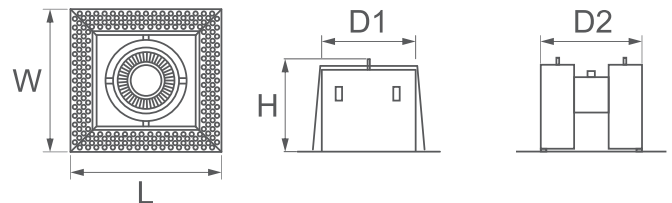

LIGHT BEAM CURVES

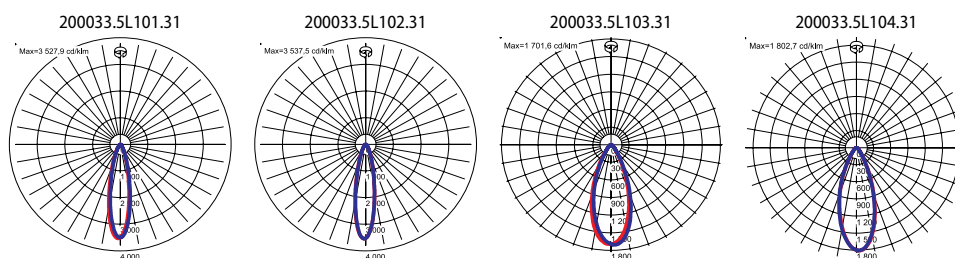

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires