


Suspended decorative luminaire for LED light sources.

<b>TECHNICAL DATA</b>	<b>Mounting:</b> suspended, on wire suspension (included) <b>Body:</b> powder painted aluminum profile, top cover made of anodized aluminum <b>Colour:</b> ecru
<b>ELECTRICAL DATA</b>	<b>Diffuser:</b> opal plexiglass (PLX) <b>Power:</b> 220-240V 50/60Hz <b>Includes light source:</b> yes <b>Type of equipment:</b> ED
<b>OPTICAL DATA</b>	<b>Way of lighting:</b> direct-indirect
<b>ADDITIONAL INFO</b>	<b>Available on request:</b> DALI
<b>GENERAL DATA</b>	<b>Warranty:</b> 3 years + 2 years after project registration <b>Application:</b> offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Colour temperature [K]	CRI/Ra
240010.5L01.12	24°	3x17,5W + 5x10W	121	4290+5000	4290 + 3750	3000	92
240010.5L02.12	24°	3x17,5W + 5x10W	121	4680+5000	4680 + 3750	4000	92
240010.5L03.12	40°	3x17,5W + 5x10W	121	4290+5000	4290 + 3750	3000	92
240010.5L04.12	40°	3x17,5W + 5x10W	121	4680+5000	4680 + 3750	4000	92

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
240010.5L01.12	1600 254 91	1360	2	1	7.0
240010.5L02.12	1600 254 91	1360	2	1	7.0
240010.5L03.12	1600 254 91	1360	2	1	7.0
240010.5L04.12	1600 254 91	1360	2	1	7.0

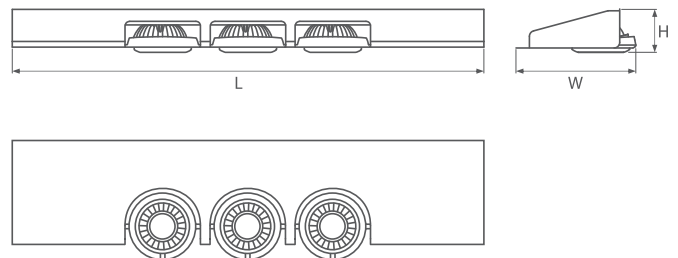

## LIGHT BEAM CURVES

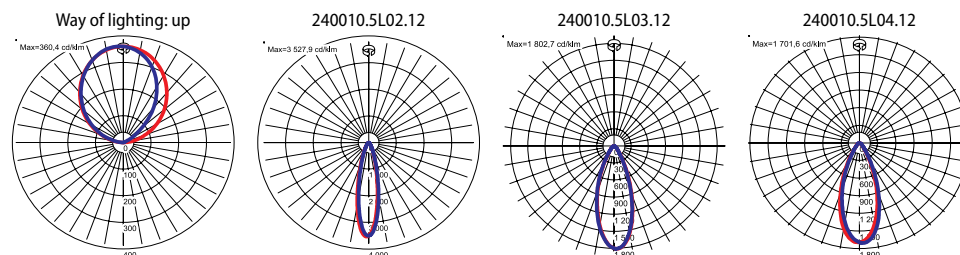

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.  
Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.  
Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires