


## System of suspended luminaires for LED light sources

<b>TECHNICAL DATA</b>	<b>Mounting:</b> suspended, on wire suspension (included) <b>Body:</b> powder painted aluminum profile, top cover made of anodized aluminum <b>Colour:</b> ecru <b>Diffuser:</b> opal plexiglass (PLX)
<b>ELECTRICAL DATA</b>	<b>Power:</b> 220-240V 50/60Hz <b>Includes light source:</b> yes <b>Type of equipment:</b> ED
<b>OPTICAL DATA</b>	<b>Way of lighting:</b> direct-indirect
<b>ADDITIONAL INFO</b>	<b>Available on request:</b> DALI
<b>GENERAL DATA</b>	<b>Warranty:</b> 3 years + 2 years after project registration <b>Application:</b> offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Colour temperature [K]	CRI/Ra
240020.5L09.12	24°	9x17,5W + 15x10W	362	12870+15000	12870 + 11250	3000	92
240020.5L10.12	24°	9x17,5W + 15x10W	362	14040+15000	14040 + 11250	4000	92
240020.5L11.12	40°	9x17,5W + 15x10W	362	12870+15000	12870 + 11250	3000	92
240020.5L12.12	40°	9x17,5W + 15x10W	362	14040+15000	14040 + 11250	4000	92

Code	Dimensions [mm] L W H D D1	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
240020.5L09.12	1600 1600 91 254 220	1235 1110	2	1	30.2
240020.5L10.12	1600 1600 91 254 220	1235 1110	2	1	30.2
240020.5L11.12	1600 1600 91 254 220	1235 1110	2	1	30.2
240020.5L12.12	1600 1600 91 254 220	1235 1110	2	1	30.2

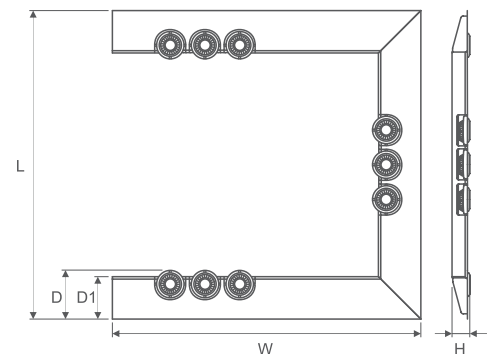

## LIGHT BEAM CURVES

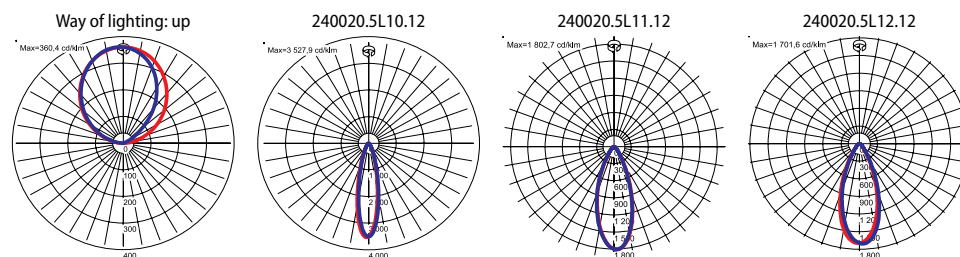

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires