

Suspended decorative luminaire for LED light sources.

TECHNICAL DATA	Mounting: suspended, on wire suspension (included) Body: plastic polyester reinforced with fiberglass Colour: white, black Diffuser: opal plexiglass (PLX), microprismatic diffuser (MPRM)
ELECTRICAL DATA	Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: opal diffuser, DALI, DIM 1..10V
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Diffuser: opal plexiglass (PLX)							
20005X.5L01.1X1	36	43	5200	3900	91	4000	≥81
20005X.5L02.1X1	36	43	5000	3800	88	3000	≥81
Diffuser: microprismatic diffuser (MPRM)							
20005X.5L01.1X2	36	43	5200	4100	95	4000	≥81
20005X.5L02.1X2	36	43	5000	3950	92	3000	≥81

20005 .5L01.1 2

	Colour of decorative elements
1	<input type="checkbox"/> pink
2	<input type="checkbox"/> red
3	<input type="checkbox"/> green
4	<input type="checkbox"/> blue
5	<input type="checkbox"/> yellow
Body colour	
1	<input type="checkbox"/> white
3	<input type="checkbox"/> black

Code	Dimensions [mm] L H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
Diffuser: opal plexiglass (PLX)					
20005X.5L01.1X1	443 540	220	4	1	5.5
20005X.5L02.1X1	443 540	220	4	1	5.5
Diffuser: microprismatic diffuser (MPRM)					
20005X.5L01.1X2	443 540	220	4	1	5.5
20005X.5L02.1X2	443 540	220	4	1	5.5

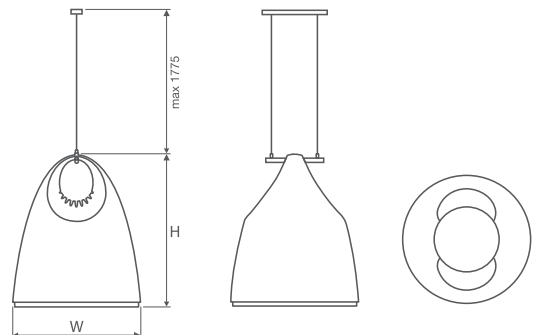

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

OTHER PICTURES



LIGHT BEAM CURVES

