

Suspended decorative luminaire for LED light sources.

TECHNICAL DATA	Mounting: suspended, on wire suspension (included) Body: plastic polyester reinforced with fiberglass Colour: white, black Diffuser: opal plexiglass (PLX), microprismatic diffuser (MPRM)
ELECTRICAL DATA	Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: opal diffuser, DALI, DIM 1..10V
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Diffuser: opal plexiglass (PLX)							
20002X.5L01.1X1	107	126	15600	12300	98	4000	≥81
20002X.5L02.1X1	107	126	15000	11900	94	3000	≥81
Diffuser: microprismatic diffuser (MPRM)							
20002X.5L01.1X2	107	126	15600	12300	98	4000	≥81
20002X.5L02.1X2	107	126	15000	11900	94	3000	≥81

20002 .5L01.1 2

	Colour of decorative elements
1	<input type="checkbox"/> pink
2	<input type="checkbox"/> red
3	<input type="checkbox"/> green
4	<input type="checkbox"/> blue
5	<input type="checkbox"/> yellow
Body colour	
1	<input type="checkbox"/> white
3	<input type="checkbox"/> black

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L D	Pallet quantity	Quantity in package	Net weight [kg]
Diffuser: opal plexiglass (PLX)					
20002X.5L01.1X1	886 886 1060	400 80	1	1	21.0
20002X.5L02.1X1	886 886 1060	400 80	1	1	21.0
Diffuser: microprismatic diffuser (MPRM)					
20002X.5L01.1X2	886 886 1060	400 80	1	1	21.0
20002X.5L02.1X2	886 886 1060	400 80	1	1	21.0

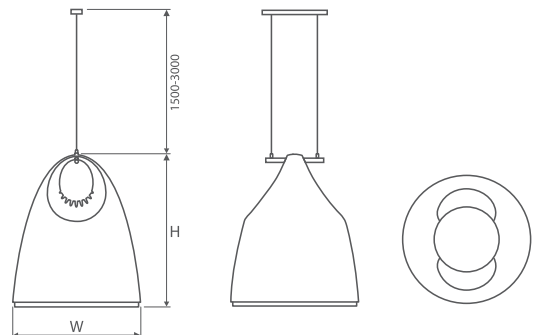

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com


Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

OTHER PICTURES



LIGHT BEAM CURVES



OTHER PROJECTS



Hamama Bilo, Izrael

Frikirken Church, Norway

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires