

Suspended decorative luminaire for LED light sources.

TECHNICAL DATA

Mounting: suspended, on wire suspension (included)
Body: powder painted steel sheet and top quality plastic
Colour: ecru

ELECTRICAL DATA

Diffuser: opal plexiglass (PLX)
Power: 220-240V 50/60Hz
Includes light source: yes

OPTICAL DATA

Type of equipment: ED
Way of lighting: direct

ADDITIONAL INFO

Available on request: DALI


GENERAL DATA

Warranty: 3 years + 2 years after project registration
Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques



Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
210050.5L01.112	120°	3x10	36	3000	2100	58	4000	≥81
210050.5L02.112	120°	3x10	36	3000	2100	58	3000	≥81

Code	Dimensions [mm] L W H D	Pallet quantity	Quantity in package	Net weight [kg]
210050.5L01.112	930 123 150 604	24	1	4.0
210050.5L02.112	930 123 150 604	24	1	4.0

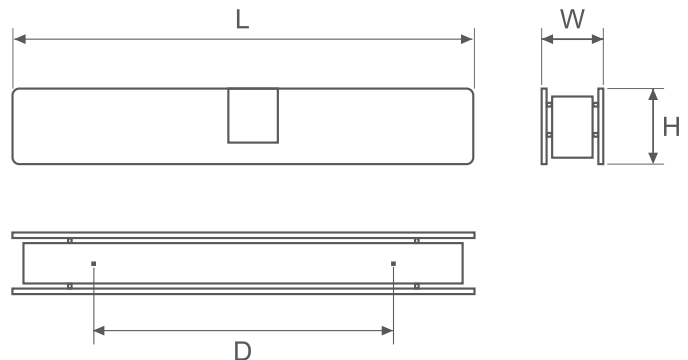

OTHER PICTURES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

LIGHT BEAM CURVES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires