

Suspended decorative luminaire for LED light sources.

TECHNICAL DATA	Mounting: suspended, on wire suspension (included) Body: plastic polyester reinforced with fiberglass Colour: white, black Diffuser: opal plexiglass (PLX), microprismatic diffuser (MPRM)
ELECTRICAL DATA	Electrical connection: max 3x2,5 mm ² wire Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: DIM 1., 10V, DALI Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques



Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Diffuser: opal plexiglass (PLX)							
20008X.5L01.1X1	36	43	5000	3800	88	3000	≥81
20008X.5L02.1X1	36	43	5200	3900	91	4000	≥81
Diffuser: microprismatic diffuser (MPRM)							
20008X.5L01.1X2	36	43	5000	3950	92	3000	≥81
20008X.5L02.1X2	36	43	5200	4100	95	4000	≥81

20008 .5L01.1 2


Colour of decorative elements

- 1 pink
- 2 red
- 3 green
- 4 blue
- 5 yellow
- 6 white
- 7 black

Body colour

- 1 white
- 3 black

Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
Diffuser: opal plexiglass (PLX)					
20008X.5L01.1X1	535 1150	380	2	1	8.2
20008X.5L02.1X1	535 1150	380	2	1	8.2
Diffuser: microprismatic diffuser (MPRM)					
20008X.5L01.1X2	535 1150	380	2	1	8.2
20008X.5L02.1X2	535 1150	380	2	1	8.2

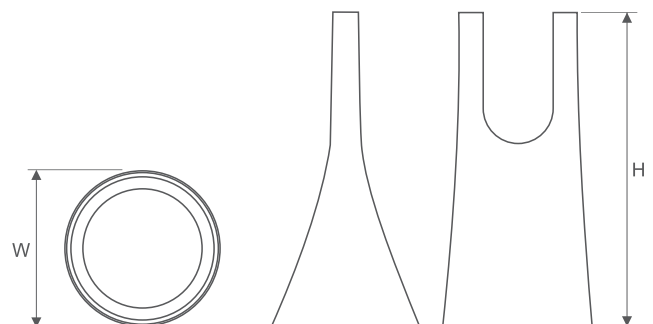

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

LIGHT BEAM CURVES

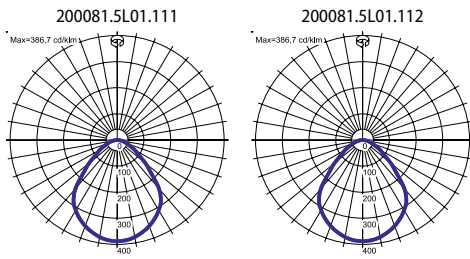

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires