

Suspended decorative luminaire for LED light sources.

#### TECHNICAL DATA

**Mounting:** suspended, on wire suspension (included)

**Body:** black glossy plastic material

**Colour:** black

**Diffuser:** opal plexiglass (PLX)

#### ELECTRICAL DATA

**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** ED

#### OPTICAL DATA

**Way of lighting:** direct

#### ADDITIONAL INFO

**Available on request:** DALI

#### GENERAL DATA


**Warranty:** 3 years + 2 years after project registration

**Application:** offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
250053.5L01.11	34	40	3400	1650	41	3000	≥81
250053.5L02.11	34	40	3750	1850	46	4000	≥81

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
250053.5L01.11	850 270 40	416 58	8	1	4.5
250053.5L02.11	850 270 40	416 58	8	1	4.5

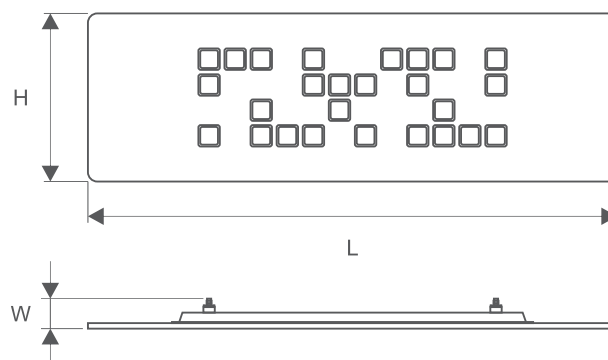

#### LIGHT BEAM CURVES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires