


Suspended decorative luminaire for LED light sources.

TECHNICAL DATA	Mounting: suspended, on wire suspension (included) Body: black glossy plastic material Colour: black
ELECTRICAL DATA	Diffuser: opal plexiglass (PLX) Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: DALI
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
250043.5L01.11	11	12	1150	550	46	3000	≥81
250043.5L02.11	11	12	1250	600	50	4000	≥81

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
250043.5L01.11	270 270 40	100 70	24	1	2.5
250043.5L02.11	270 270 40	100 70	24	1	2.5

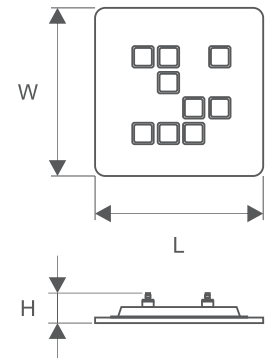

LIGHT BEAM CURVES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires