


Suspended decorative luminaire for LED light sources.

| | |
|------------------------|---|
| TECHNICAL DATA | Mounting: suspended, on wire suspension (included) Body: black glossy plastic material Colour: black |
| ELECTRICAL DATA | Diffuser: opal plexiglass (PLX) Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED |
| OPTICAL DATA | Way of lighting: direct |
| ADDITIONAL INFO | Available on request: DALI |
| GENERAL DATA | Warranty: 3 years + 2 years after project registration Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques |




| Code | Power LED [W] | Luminaire power [W] | Lumen LED [lm] | Lumen luminaire [lm] | Efficacy [lm/W] | Colour temperature [K] | CRI/Ra |
|----------------|---------------|---------------------|----------------|----------------------|-----------------|------------------------|--------|
| 250033.5L01.11 | 48 | 57 | 4530 | 2200 | 39 | 3000 | ≥81 |
| 250033.5L02.11 | 48 | 57 | 4990 | 2440 | 43 | 4000 | ≥81 |

| Code | Dimensions [mm] L H | Mounting dimensions [mm] L W | Pallet quantity | Quantity in package | Net weight [kg] |
|----------------|---------------------|------------------------------|-----------------|---------------------|-----------------|
| 250033.5L01.11 | 650 40 | 230 230 | 4 | 1 | 5.2 |
| 250033.5L02.11 | 650 40 | 230 230 | 4 | 1 | 5.2 |

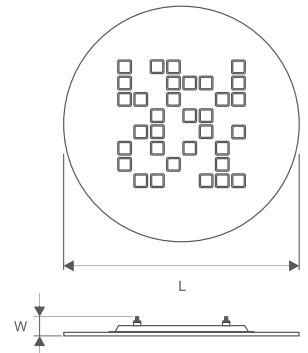

LIGHT BEAM CURVES

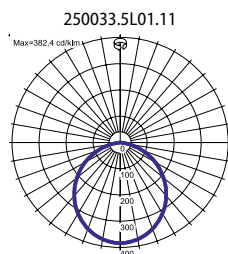

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires