


Suspended decorative luminaire for LED light sources.

<b>TECHNICAL DATA</b>	<b>Mounting:</b> suspended, on wire suspension (included)
	<b>Body:</b> powder painted steel sheet and top quality plastic
	<b>Colour:</b> ecru
	<b>Diffuser:</b> opal plexiglass (PLX)
<b>ELECTRICAL DATA</b>	<b>Power:</b> 220-240V 50/60Hz
	<b>Includes light source:</b> yes
	<b>Type of equipment:</b> ED
<b>OPTICAL DATA</b>	<b>Way of lighting:</b> direct
<b>ADDITIONAL INFO</b>	<b>Available on request:</b> DALI
<b>GENERAL DATA</b>	<b>Warranty:</b> 3 years + 2 years after project registration
	<b>Application:</b> offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques



Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
210040.5L01.112	120°	3x10	36	3000	2100	58	4000	≥81
210040.5L02.112	120°	3x10	36	3000	2100	58	3000	≥81

Code	Dimensions [mm] L W H D	Pallet quantity	Quantity in package	Net weight [kg]
210040.5L01.112	930 123 150 460	24	1	4.0
210040.5L02.112	930 123 150 460	24	1	4.0

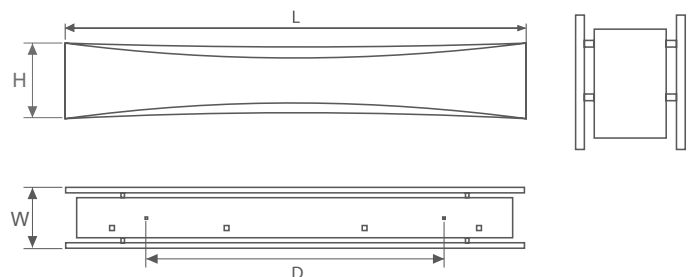

#### OTHER PICTURES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

## LIGHT BEAM CURVES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires