

Modern downlight luminaire for LED light sources for plaster board ceilings.

TECHNICAL DATA	Mounting: in the ceiling, with mounting brackets (included) Body: powder painted steel sheet and anodized aluminum Colour: white, black
ELECTRICAL DATA	Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: metal halide lamps (on request), DALI Other remarks: for metal halide version - please order MH light sources
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: hotels, offices, delicatessen, galleries, boutiques, shopping centers




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
22002X.5L301.3X3	24°	3x17,5	62	3x1560	4680	75	4000	92
22002X.5L302.3X3	24°	3x17,5	62	3x1430	4290	69	3000	92
22002X.5L303.3X3	40°	3x17,5	62	3x1560	4680	75	4000	92
22002X.5L304.3X3	40°	3x17,5	62	3x1430	4290	69	3000	92

22002 .5L.101.3 1

	Colour of decorative elements
1	<input type="checkbox"/> pink
2	<input type="checkbox"/> red
3	<input type="checkbox"/> green
4	<input type="checkbox"/> blue
5	<input type="checkbox"/> yellow
6	<input type="checkbox"/> white
7	<input type="checkbox"/> black
Body colour	
1	<input type="checkbox"/> white
3	<input type="checkbox"/> black

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
22002X.5L301.3X3	500 196 144	30	1	4.6
22002X.5L302.3X3	500 196 144	30	1	4.6
22002X.5L303.3X3	500 196 144	30	1	4.6
22002X.5L304.3X3	500 196 144	30	1	4.6




Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

LIGHT BEAM CURVES

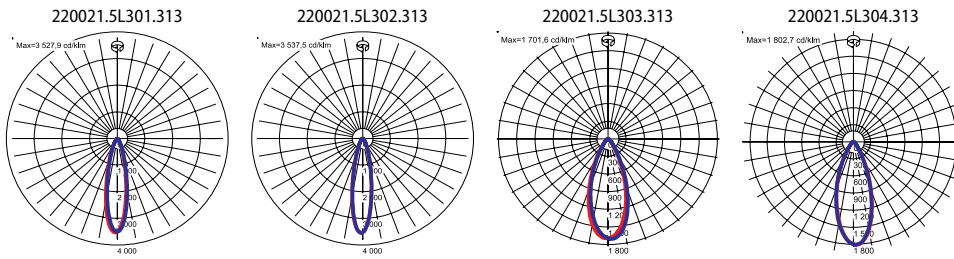

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires