

Modern downlight luminaire for LED light sources for plaster board ceilings.

TECHNICAL DATA	Mounting: in the ceiling, with mounting brackets (included) Body: powder painted steel sheet and anodized aluminum Colour: white, black
ELECTRICAL DATA	Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct
ADDITIONAL INFO	Available on request: metal halide lamps (on request), DALI Other remarks: for metal halide version - please order MH light sources
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: hotels, offices, delicatessen, galleries, boutiques, shopping centers




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
22002X.SL401.3X7	24°	4x17,5W	83	4x1560	6240	75	4000	92
22002X.SL402.3X7	24°	4x17,5W	83	4x1430	5720	69	3000	92
22002X.SL403.3X7	40°	4x17,5W	83	4x1560	6240	75	4000	92
22002X.SL404.3X7	40°	4x17,5W	83	4x1430	5720	69	3000	92

22002 .5L.101.3 1

	Colour of decorative elements
1	pink
2	red
3	green
4	blue
5	yellow
6	white
7	black
Body colour	
1	white
3	black

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
22002X.SL401.3X7	500 348 144	30	1	5.5
22002X.SL402.3X7	500 348 144	30	1	5.5
22002X.SL403.3X7	500 348 144	30	1	5.5
22002X.SL404.3X7	500 348 144	30	1	5.5




Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

LIGHT BEAM CURVES

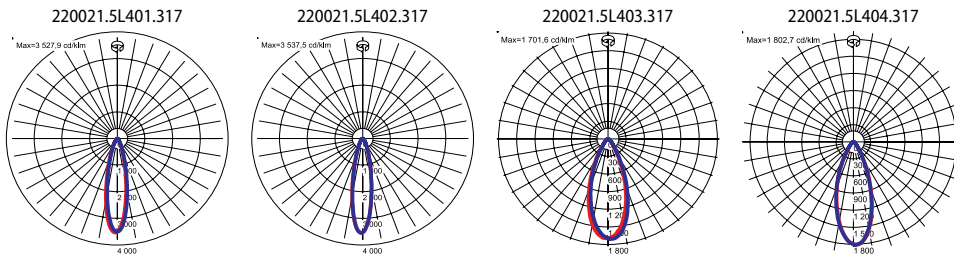

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 26-2-2016

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires